



IPT-VF5MPDM-2812

5MP H.265 IR Dome IP Camera



Key Features

- High quality image with 5MP, 1/2.8" CMOS
- 5MP (2592x1904) @ 20FPS, 4MP (2560x1440) @ 20FPS, 3MP (2304x1296) @ 25FPS, 2MP (1920x1080) @ 25FPS
- H.265, H.264
- Support PoE power supply
- Support Multiple streams
- Support mobile surveillance by smart phones
- Network Storage
- ONVIF

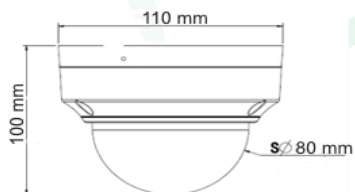

DM-5560

DM-5562



DM-5525

BL-P3871



| Video | |
|-------------------------|---|
| Imaging Device | 1/2.8 "SONY Starvis Back illuminated CMOS sensor |
| Scanning System | Proressive |
| Min. Illumination | 0.006 Lux @@(F1.6, AGC ON),B/W: 0 Lux with white light |
| Lens | |
| Focal Length | 2.8-12mm Verifocal Lens, Motorized Zoom Lens |
| Lens Type | Verifocal |
| Mount Type | Board-in Type |
| Operational | |
| Camera Title | Off/on Multile Line ISD |
| IR Viewable Length | 30Meters |
| Day & Night | Auto, External Trigger, Color, B/W |
| Backlight Comp. | Off, HighLight/ Backlight Correction |
| Wide Dynamic range | Off, DWDR |
| Defog | On / Off |
| Motion Detection | Off / On (4ea polygonal zones) |
| Privacy Masking | Off / On (6ea rectangular zones) |
| Gain Control | Off / Low / Middle / High |
| White Balance | Automatic / Warm, Naural, Fluorescent |
| Shutter Speed | 1/5- 1/100000 |
| Digital Zoom | Yes |
| Flip / Mirror | On / Off |
| Alram Triggers | Motion, Video Tamper |
| Network | |
| Ethernet | RJ-45 (10/100BASE-T) |
| Video Compression | H.265,H.264,S265 |
| Resolution | 5MP (2592x1904) @ 20FPS, 4MP (2560x1440) @ 20FPS, 3MP (2304x1296) @ 25FPS, 2MP (1920x1080) @ 25FPS |
| Max. Framerate | 25 FPS |
| Bitrate Control Method | VBR, VCR, Fixed |
| Bitrate | 16kbps-4MBPs |
| Streaming Capability | Dual, Main & Sub |
| IP | IPv4 |
| Protocol | TCP/IP, UDP/IP, RTP(UDP), RTP(TCP), RTCP,RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3(MIB-2), ARP, DNS, DDNS, QoS, PIM-SM, UPnP |
| API | ONVIF |
| Web Viewer | IE, Chrome, Firefox |
| ENVIRONMENTAL | |
| Operating Temp. | 30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH |
| Storage Temp. | 30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH |
| IP Rating | IP65 |
| ELECTRICAL | |
| Input Voltage / Current | PoE (IEEE802.3af, Class3) |
| Power Consumption | Max. 5.5W |
| MECHANICAL | |
| Color / Material | Ivory / Aluminium |
| Dimensions (WxH) | Ø110 x 80 mm (Ø4.3" x 3.2") |
| Weight | 550g (1.21 lb) |